



Mapping (dis)agreement in hydrologic projections

Lieke A. Melsen¹, Nans Addor^{2,3}, Naoki Mizukami², Andrew J. Newman², Paul J. J. F. Torfs¹, Martyn P. Clark², Remko Uijlenhoet¹, and Adriaan J. Teuling¹

¹Hydrology and Quantitative Water Management Group, Wageningen University, Wageningen, the Netherlands

²National Center for Atmospheric Research (NCAR), Boulder, CO, USA

³Climatic Research Unit, University of East Anglia, Norwich, UK

Correspondence: Lieke A. Melsen (lieke.melsen@wur.nl)

Received: 15 September 2017 – Discussion started: 26 September 2017

Revised: 22 January 2018 – Accepted: 9 February 2018 – Published: 12 March 2018

Abstract. Hydrologic projections are of vital socio-economic importance. However, they are also prone to uncertainty. In order to establish a meaningful range of storylines to support water managers in decision making, we need to reveal the relevant sources of uncertainty. Here, we systematically and extensively investigate uncertainty in hydrologic projections for 605 basins throughout the contiguous US. We show that in the majority of the basins, the sign of change in average annual runoff and discharge timing for the period 2070–2100 compared to 1985–2008 differs among combinations of climate models, hydrologic models, and parameters. Mapping the results revealed that different sources of uncertainty dominate in different regions. Hydrologic model induced uncertainty in the sign of change in mean runoff was related to snow processes and aridity, whereas uncertainty in both mean runoff and discharge timing induced by the climate models was related to disagreement among the models regarding the change in precipitation. Overall, disagreement on the sign of change was more widespread for the mean runoff than for the discharge timing. The results demonstrate the need to define a wide range of quantitative hydrologic storylines, including parameter, hydrologic model, and climate model forcing uncertainty, to support water resource planning.

mestic, agricultural, and industrial consumers, including hydropower (Van Vliet et al., 2012) and inland navigation, and to design infrastructure to reduce the risk of flooding (Milly et al., 2002) and drought (Van Loon et al., 2016) in a changing climate. Models are needed to provide quantitative projections of how water resources will be affected by climate change. These projections remain, however, uncertain (Milly et al., 2005; Clark et al., 2016). To account for this uncertainty, quantitative hydrologic storylines, in which key features of climate change impact are represented, can guide water managers in developing dynamic policy pathways (Haasnoot et al., 2013). In order to establish a meaningful range of quantitative hydrologic storylines, we need to reveal, reduce, and represent this uncertainty (Clark et al., 2016; McMillan et al., 2017).

All models in the Earth sciences are subject to conceptualization (Oreskes et al., 1994): since not all of nature's complexity can be captured on the scale of a model grid, processes are neglected, simplified, or scaled up in the model compared to reality. A result of this conceptuality is that modellers make different decisions at different points in the model development process (Clark et al., 2011, 2015), producing models that have different portrayals of climate (Knutti and Sedláček, 2013; Knutti et al., 2013) or hydrologic (Mendoza et al., 2015a; Addor et al., 2014) change. Hydrologic projections require a long chain of models, with each step along the chain introducing uncertainty into the projection (Clark et al., 2016; Sonnenborg et al., 2015). As such, long-term hydrologic projections are prone to the uncertainty in model inputs from down-scaled general circulation model (GCM) projections (Knutti and Sedláček, 2013). But the hydrologic model itself also

1 Introduction

A thorough understanding of the terrestrial component of the hydrological cycle is vitally important to ensure water resource management meets the many demands for water. Understanding the availability of water is important for do-

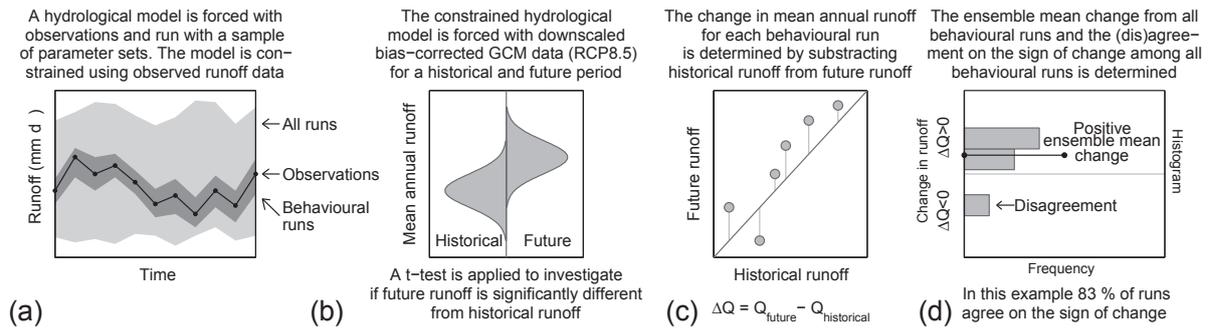


Figure 1. Overview of the conducted procedure, demonstrated for the mean runoff metric. For the discharge timing metric, the same procedure was employed. This procedure was repeated for 15 combinations of three hydrologic models and five general circulation models (GCMs) using Representative Concentration Pathway (RCP) 8.5. **(a)** The hydrologic model was run with a sample of parameter sets for the period 1985–2008. The model was forced with observed Daymet data (Thornton et al., 2012). The size of the parameter sample differed per model, from 1600 to 1900 (see Sect. 2). Behavioural runs were identified based on 23 years of daily observed discharge data. **(b)** The constrained models, i.e. the behavioural parameter sets, were forced with GCM data for the historical period 1985–2008 and future period 2070–2100. For each run, the mean annual runoff was determined for both periods. **(c)** The change is defined as the difference in mean annual runoff between the historical and future periods, and is determined per run. **(d)** Histogram showing the distribution of the change for the different model runs as shown in (c). The sign of the ensemble mean change is determined, as well as the agreement among the different parameter sets on the sign of the ensemble mean change. The agreement is defined as the percentage of runs that project the same sign of change (positive change = increasing mean annual runoff; negative change = decreasing mean annual runoff) as the ensemble mean change. Finally, the sign of the ensemble mean change is compared for different combinations of hydrologic models and GCMs.

introduces uncertainty, both through the parameters (Vaze et al., 2010; Merz et al., 2011) and through the model structure, the conceptualization. The effect of model conceptualization on projected trends was underscored by a study on global trends in drought (Sheffield et al., 2012). Sheffield et al. (2012) compared the estimate of areas in agricultural drought obtained using the temperature-based Thornthwaite equation to estimate potential evaporation, with the results obtained with the more physically founded Penman–Monteith equation. A much stronger (weaker) increase in global areas in drought was found when using the Thornthwaite (Penman–Monteith) formulation. The representation of underlying (physical) principles of hydrological processes in the hydrologic model can thus have a profound effect on the results and conclusion of a study.

Although uncertainty in hydrologic projections has already been discussed and investigated in the literature, studies usually focus on one source of uncertainty (Gutmann et al., 2014) or a limited number of catchments (Vidal et al., 2016; Addor et al., 2014; Dobler et al., 2012). Here, we investigate three sources of uncertainty (GCM forcing, hydrologic parameters, hydrologic model structure) in hydrologic projections for 605 basins throughout the contiguous US over a wide range of climates, in order to reveal spatial patterns in uncertainty. We investigate the agreement in hydrologic projections for a volume metric (the annual average runoff) and a timing metric (the day of the year on which half of the discharge has passed).

2 Methodology

We assess the uncertainty in hydrologic projections using a multi-parameter multi-model multi-basin approach. We investigate the role hydrologic model parameters, hydrologic models, and GCM choice play in the uncertainty of hydrologic projections. We employ three frequently used hydrologic models (SAC, VIC, HBV), constrained based on observations, and five different climate models from the Coupled Model Intercomparison Project Phase 5 (CMIP5, RCP8.5), to evaluate the sign of change in a volume and a timing metric over the period 2070–2100 compared to 1985–2008. An overview of the procedure can be found in Fig. 1.

The two investigated metrics are the long-term mean runoff and the day of the year where half of the discharge has passed (referred to as “discharge timing”). We focus on agreement in the sign of change only, and not on agreement in the size of the change. Although agreeing on the sign of change in mean runoff might already not be straightforward, it is a first and necessary condition in robust projections. All other relevant variables, such as peak flows or drought (Roudier et al., 2016), are even harder to project, as they are related to runoff variability rather than mean runoff.

The large sample of basins employed in this study (605, spread over the contiguous US, CONUS, Newman et al., 2014, 2015) provides the opportunity to study agreement in projections across a range of climate and catchment conditions, and to attribute the uncertainty to particular hydrological processes (Gupta et al., 2014). We will discuss the results based on an example for the VIC model, because this

model is widely applied for climate impact assessments, and the CNRM-CM5 GCM was chosen as the reference GCM because this model has the lowest bias in CONUS (Sheffield et al., 2013). The results from the other hydrologic model–GCM combinations are presented in the Supplement.

2.1 Catchment information

We will employ 605 basins throughout the contiguous US. Input data and discharge observations for all basins are publicly available; see Newman et al. (2014, 2015). The median size of the catchments in the dataset is 361 km², but areas range from 4 to 25 800 km². The mean elevation from the catchments ranges from 14 to 3640 m, with a median elevation of 454 m. The steepest catchment has a mean slope of 14.3°, the most gentle catchment has a slope of 0.05°, and the median slope of the catchments in the dataset is 1.5°. Land use in the catchments varies from mixed forest to grassland and from savannah to cropland. The publicly available CAMELS dataset (Addor et al., 2017a, b) contains several attributes of all basins: topographic characteristics, climate characteristics, hydrologic signatures, and land cover, soil, and geological characteristics. The catchments have been selected to minimize human influence, and are therefore mainly smaller headwater catchments (Newman et al., 2015). The discharge for all 605 basins is simulated for two periods: a historical period from 1980 to 2008 (of which we consider 23 years due to the 5-year model spin-up) and a future period from 2065 to 2100 (of which we consider 30 years due to the 5-year model spin-up). The different lengths of both simulation periods can influence the calculated means, but this effect is expected to be limited.

2.2 Hydrologic models and parameter sampling strategy

We apply three frequently used hydrologic models, which were run in a lumped fashion for the 605 basins: VIC 4.1.2h (Liang et al., 1994), SAC-SMA combined with SNOW-17 (Newman et al., 2015), and the TUW model following the structure of HBV (Parajka et al., 2007). A very brief description of the employed models can be found below.

2.2.1 Variable Infiltration Capacity model (VIC)

The Variable Infiltration Capacity (VIC Liang et al., 1994, 1996) model is a land-surface model that solves both the water and energy balance. Three soil layers are distinguished. Evaporation takes place based on the available moisture from the upper soil layer. Depending on the rooting depth, water can be extracted from deeper soil layers for transpiration. For the upper two soil layers, the Xinanjiang formulation (Zhao et al., 1980) is used to describe infiltration. This formulation assumes that the infiltration capacity varies within an area. Moisture transport downwards is gravity-driven and only dictated by the moisture level of the upper soil layer. Runoff can

consist of surface runoff and baseflow from the different soil layers. Surface runoff occurs when precipitation intensity exceeds the local infiltration capacity of the soil. Each soil layer can generate baseflow, linked to the soil moisture content of the layer based on the conceptualization of the Arno model (Francini and Pacciani, 1991). Generally, the deeper soil layers have a slower response. The snow model is a two-layer accumulation–ablation model, which solves both the energy and the mass balance. At the top layer of the snow cover, the energy exchange takes place. A zero energy flux boundary is assumed at the snow–ground interface.

2.2.2 Sacramento Soil Moisture Accounting model (SAC)

The Sacramento Soil Moisture Accounting model (SAC, Burnash et al., 1973; National Weather Service, 2002) is a bucket-type model that was developed by the US National Weather Service. The two basic components of SAC are tension water, water present in the soil but due to absorption to soil particles only removable through evaporation and transpiration, and free water, water that is available for percolation and drainage. Furthermore, SAC divides the soil into an upper and a lower zone. Runoff consists of direct runoff, interflow, and baseflow. Direct runoff is generated from impervious areas, and when rainfall intensity exceeds the infiltration rate of the soil or when the soil is saturated. Interflow is dictated by the “free water” in the upper soil zone, whereas baseflow is determined based on the “free water” in the lower soil zone. Snow-17 is an air–temperature-index-based snow accumulation and ablation model (Anderson, 1973).

2.2.3 Hydrologiska Byråns Vattenbalansavdelning model (HBV)

The Hydrologiska Byråns Vattenbalansavdelning model (HBV, Bergström, 1976, 1992) was developed in Sweden. The HBV model consists of three main components: snow accumulation and melt (the snow routine), soil moisture (the soil routine), and response and river routing (response function and routing routine). Snow accumulation and snowmelt are parameterized with a degree-day expression, based on two parameters, one which represents the threshold level above which snowmelt starts and one below which precipitation falls as snow. The soil routine is controlled by the maximum soil moisture storage, a non-linear function that describes the relation between soil moisture level and recharge and a parameter that links the soil moisture level to evaporation. Runoff is generated by recharge from the soil moisture routine into two reservoirs: a fast responding reservoir generating fast response runoff, and a slow responding reservoir (baseflow) that is fed with percolation water from the fast responding reservoir.

For each model, a representative set of parameters that capture the essential hydro-climatological features was iden-

tified. A large range of parameters was sampled using a Sobol-based Latin hypercube sample: 17 parameters for VIC (Demaria et al., 2007; Chaney et al., 2015; Melsen et al., 2016; Mendoza et al., 2015b), 18 parameters for SAC (Newman et al., 2015; Lhomme, 1997), and 15 for HBV (Parajka et al., 2007; Uhlenbrook et al., 1999; Abebe et al., 2010). Physically realistic parameter boundaries were determined, based on the literature: see Tables C1–C3. First, based on the average parameter values (halfway between the maximum and minimum values as mentioned in the Supplement tables), 100 base runs were sampled. Subsequently, each parameter was sampled 100 times by applying perturbations to the base runs. This implies that for each of the 605 basins, SAC was run 1900 times, VIC 1800 times, and HBV 1600 times (leading to a total of 3.2 million runs per time period). The hydrologic models were forced with daily Daymet observed meteorological variables (Thornton et al., 2012) and the model output from the different parameter sets was compared with daily USGS observed discharges over a 23-year period (1985–2008). The period 1980–1985 was used as spin-up for the model. Five years of spin-up were considered sufficient: for VIC, when run on an hourly basis, 3 months was shown to be sufficient to diminish the effect of initial conditions (Melsen et al., 2016), and Seibert and Vis (2012) state that a 1-year warm-up period on a daily basis is sufficient in most cases for the HBV model. The effect of initial conditions can be longer in drier climates. The parameter sets were considered behavioural as soon as they fulfilled a criterion that minimizes the Euclidean distance between observations and simulations for three components: the correlation, the relative variability, and the relative bias, the Kling–Gupta efficiency (E_{KG} , Gupta et al., 2009).

$$E_{KG}(Q) = 1 - \sqrt{(r - 1)^2 + (\alpha - 1)^2 + (\beta - 1)^2}, \quad (1)$$

where r is the correlation between observed and simulated runoff, α is the standard deviation of the simulated runoff divided by the standard deviation of observed runoff, and β is the mean of the simulated runoff, divided by the mean of the observed runoff. The parameter set needed to result in a E_{KG} of at least 0.5 on a daily basis over 23 years in order to be considered behavioural; see Fig. 1a. If none of the parameter sets fulfilled the performance criterion, the hydrologic model was considered non-behavioural. Using a fixed threshold can result in a different number of parameter sets being classified as behavioural for the different catchments. Figure C1 displays the percentage of behavioural parameter sets per model per catchment.

2.3 GCM forcing data

The constrained hydrologic models were forced with statistically downscaled and bias-corrected GCM output using bias-corrected spatial disaggregation (Wood et al., 2004) for a historical (1980–2008) and future (2065–2100) period and

run with a daily time step (Fig. 1b). The first 5 years of both periods were used as a spin-up period and ignored in the analysis. Five different climate models from the Coupled Model Intercomparison Project Phase 5 (CMIP5) using Representative Concentration Pathway 8.5 (RCP8.5) were employed: CNRM-CM5, IPSL-CM5A-MR, CCSM4, MPI-ESM-MR, and INM-CM4. These five climate models were selected based on the climate model genealogy proposed by Knutti et al. (2013). They defined GCM families based on their predicted change in temperature and precipitation for the end of the 21st century using RCP8.5. By selecting one member (GCM) of each GCM family, we approach the full range of projections by all GCMs. From each family, the member with the smallest bias in temperature and precipitation for the contiguous US (Sheffield et al., 2013) was selected.

2.4 Test for significant change

In order to test whether the projected change in mean annual runoff and discharge timing was significant, a t -test was applied, which compared the distribution of the metrics over the behavioural parameter sets for the historical period with the distribution of the metrics for the same parameter sets for the future period (Fig. 1b). The threshold in order to be qualified as significant was $p < 0.05$. In order to apply the t -test, we set a pragmatic lower boundary of at least 10 parameter sets that needed to be behavioural. For VIC, SAC, and HBV, 0.5, 0.8, and 0.7 % of the basins, respectively, had less than 10 behavioural parameter sets but at least 1 behavioural parameter set. In these basins, the significance of the projected change could not be tested. We first considered excluding the basins with a non-significant change from the analysis, following the approach of Knutti and Sedláček (2013) where agreement and significance are combined in a robustness metric. However, it turned out that none of the basins experienced a consistent non-significant change in any of the two metrics over different hydrologic models and GCMs. Therefore none of the basins was excluded.

2.5 Analysis of agreement in projected change

To determine the change in the two investigated metrics for a basin, the simulated mean annual runoff and the discharge timing over the period 1985–2008 were compared with the simulated mean annual runoff and discharge timing over the period 2070–2100 for each behavioural parameter set. The difference in the metrics between both periods is the projected *change*, where the change in mean annual runoff can be an *increase* or *decrease* (Fig. 1c), and the change in discharge timing can be *earlier* or *later* in the year. The ensemble mean change was then determined as the mean change for all the behavioural parameter sets (Fig. 1d). The ensemble mean change has been determined for each hydrologic model and climate model combination separately. In this study we

particularly focus on the sign of the ensemble mean change (i.e. an increase or decrease in mean annual runoff, and an earlier or later discharge timing).

We related the sign of the ensemble mean change in both metrics to three sources of uncertainty: hydrologic model parameters, the choice of the hydrologic model, and climate forcing. To identify the uncertainty induced by the representative parameter sets (the behavioural runs), the agreement among the representative sample of parameter sets on the sign of change was determined per basin (Fig. 1d). To investigate the effect of the choice of the hydrologic model, the sign of the ensemble mean change projected for the three different hydrologic models was compared per basin. To investigate the impact of the type of climate forcing on hydrologic projections, the sign of the ensemble mean change obtained by forcing the same hydrologic model with five different GCM outputs was compared.

Given the spatial patterns observed in the (dis)agreement when comparing hydrological models and GCMs, we investigated whether catchment and climate characteristics influence the (dis)agreement. To assess the influence on the hydrological model agreement, we divided all basins into three categories: basins in which the three hydrologic models agree on the sign of change, basins where the three hydrologic models disagree, and basins where the three hydrologic models are non-behavioural. For all basins, eight catchment and climate characteristics were identified. With a *t*-test, the climate and catchment characteristics for each category were compared to the complete sample of basins, to identify which characteristics were significantly ($p < 0.05$) different among the three categories. To investigate the effect of the GCM, the sign of the ensemble mean change from the same hydrologic model forced with five different GCMs was compared. In this case, the basins were divided into two categories: basins where the model outputs obtained with different GCM forcings consistently agree on the sign of change, and basins where the model outputs disagree using different GCMs. Subsequently, these categories have been related to four climate change characteristics and tested on significance ($p < 0.05$) using a *t*-test.

2.6 Combined sources of uncertainty

To investigate whether there is any correlation between the three investigated sources of uncertainty, we combined the results of the previous analyses, where the three sources of uncertainty were investigated separately. For each basin and for all model combinations, we determined whether hydrologic parameters (15 GCM–hydrologic model combinations), hydrologic models (5 GCM–hydrologic model combinations), and/or GCMs (3 GCM–hydrologic model combinations) lead to disagreement in the projections. This resulted in a classification of each basin into eight different classes; either only one of the three sources of uncertainty leads to disagreement in the projection (parameters or hydro-

logic models, or GCMs), two different sources of uncertainty lead to disagreement (e.g. both the parameters and the hydrologic model), all three different sources of uncertainty lead to disagreement, or none of the sources of uncertainty leads to disagreement. To visualize these results, we determined a grid-based ($1^\circ \times 1^\circ$) maximum likelihood: for each grid cell, the most frequent classification from the basins within that grid cell was determined.

3 Results

3.1 Impact of behavioural parameters

3.1.1 Mean runoff

Results show that the sign of the change in mean annual runoff can be affected by the choice of hydrologic model parameters, even when only considering hydrologic model parameter sets that provide reasonable simulations of current hydrological behaviour (see Sect. 2.2). As an example of the VIC model forced with CNRM-CM5, we find a disagreement on the sign of the change in 11 % of the basins. In these basins, some parameter sets lead to an increase in mean annual runoff, while other parameter sets lead to a decrease in mean annual runoff in the future under the same forcing. Figure 2a shows the spatial distribution of these basins. Clustering of basins with disagreement, especially in the north-west, is visible. In the majority of the basins (59 %) there is unanimous agreement on the sign of the change. However, in 29 % of the basins no representative parameter sets could be identified, i.e. the hydrologic model could not capture the hydrological behaviour of the basin in the current climate with observed forcing, and is therefore qualified as non-behavioural. In 1 % of the basins the change was not significant, or less than 10 parameter sets were identified as representative (see Sect. 2.2). The percentage of basins in which there is unanimous agreement on the sign of change among the different behavioural parameter set runs depends on the employed hydrologic model and the GCM (see Fig. A1). On average, VIC leads to 100 % agreement in 55 % of the basins (averaged over five GCMs), followed by SAC (46 %) and HBV (43 %).

3.1.2 Discharge timing

Also for the timing metric, behavioural hydrologic model parameters can lead to disagreement on the sign of change. The results for VIC forced with CNRM-CM5, shown in Fig. 2b, have a disagreement in the sign of change in 15 % of the basins (55 % unanimous agreement, 29 % no behavioural runs). Spatially, we recognize two clusters of disagreement: one in the north-west, although in different basins than where disagreement in the mean runoff metric was found, and one close to the central eastern coast in the Appalachian region, which was not found for the mean runoff metric. On average over all model combinations, hydrologic parameters lead

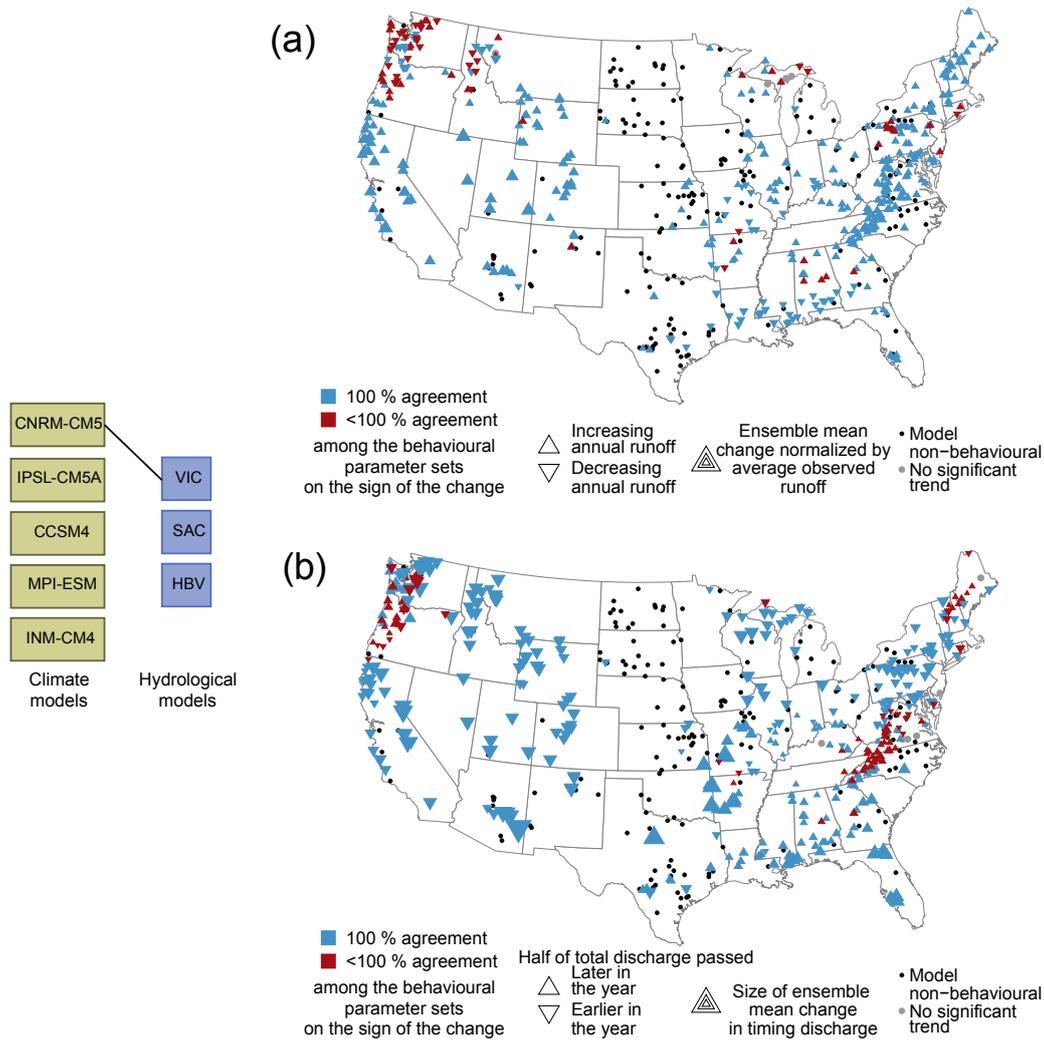


Figure 2. Distribution of uncertainty in the sign of change in mean runoff (a) and discharge timing (b) over the contiguous US when different behavioural parameter sets are compared. Left panel: combination of climate model and hydrologic model for which the results are displayed, in this case, the CNRM-CM5 climate model with the Variable Infiltration Capacity (VIC) hydrological model (SAC: Sacramento Soil Moisture Accounting model; HBV: Hydrologiska Byråns Vattenbalansavdelning model). (a) The agreement among the different model runs (representing different behavioural parameter sets) of the VIC model on the sign of the ensemble mean change in mean annual runoff. (b) The agreement among the different model runs of the VIC model on the sign of the ensemble mean change in discharge timing. The direction of the triangle marker shows the sign of the ensemble mean change; the size of the marker indicates the relative projected change.

to disagreement in discharge timing in 19% of the basins, with SAC being most sensitive to disagreement in the sign of change (on average in 27% of the basins); see also Fig. B1.

A more stringent criterion to identify representative parameter sets can potentially decrease the disagreement introduced by the parameters, but at the same time increases the number of basins in which the models are non-behavioural. Inherent to our approach is the relatively coarse parameter sample, which can explain why some models are non-behavioural in some basins while other studies have applied the same model in comparable regions (e.g. Beck et al., 2016). A larger parameter sample might decrease the num-

ber of non-behavioural basins and even allow for a more stringent selection criterion. Another reason for the non-behavioural basins could be that the warm-up period as applied in this study (5 years) was not completely sufficient for drier climates. Beck et al. (2016), for example, applied a warm-up period of at least 10 years. Furthermore, it is important to remark that the parameters have been classified based on a general performance metric, not specified for the mean runoff and/or discharge timing that were evaluated here. Not including the evaluation metrics in the optimization can lead to an inadequate depiction of those metrics (e.g. Pool et al., 2017). Including mean runoff and discharge timing as met-

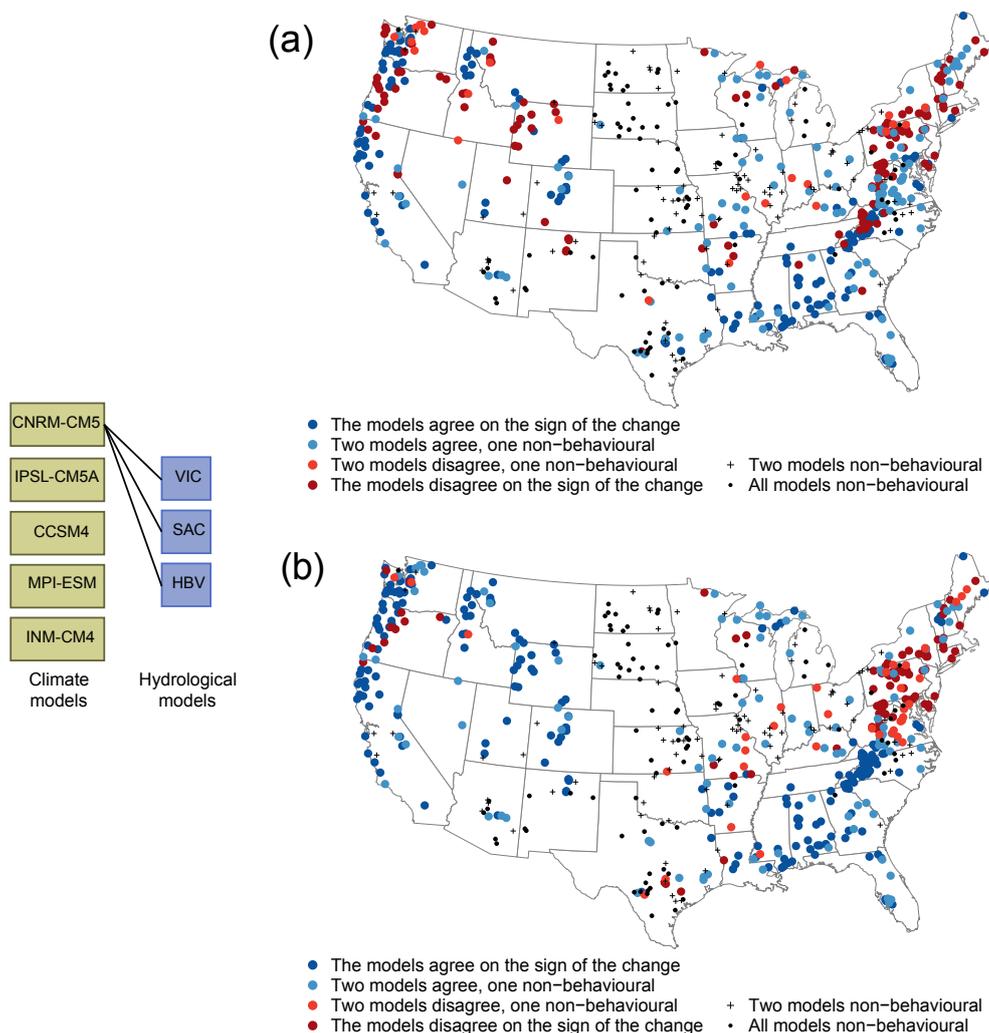


Figure 3. Distribution of uncertainty in the sign of change in mean runoff (a) and discharge timing (b) over the contiguous US when three hydrological models are compared. Left panel: combination of climate model and hydrologic model for which the results are displayed. VIC: Variable Infiltration Capacity model; SAC: Sacramento Soil Moisture Accounting model; HBV: Hydrologiska Byråns Vattenbalansavdelning model. (a) Agreement among the three different hydrologic models (all forced with CNRM-CM5) on the sign of the ensemble mean change in mean annual runoff. (b) Agreement among the three different hydrologic models (all forced with CNRM-CM5) on the sign of the ensemble mean change in discharge timing.

rics in the parameter classification procedure may decrease the disagreement, although this will, of course, also decrease the general performance as expressed in the Kling–Gupta efficiency. Another approach would be to constrain the hydrologic models on observations of several different hydrological states and fluxes, such as soil moisture and groundwater (Koster et al., 2010; Rakovec et al., 2016).

3.2 Impact of the hydrologic model

3.2.1 Mean runoff

The sign of the change in mean annual runoff is affected by the choice of the hydrologic model. The choice of the hydrologic model leads to disagreement in 26 % of the basins when the three models are forced with the same CNRM-CM5 output. Figure 3a shows the basins in which the three employed hydrologic models (dis-)agree on the sign of the change in mean annual runoff. The eastern coast shows the clearest boundary: in the north-east the models disagree, whereas in the south-east the models agree. In 46 % of the basins, three

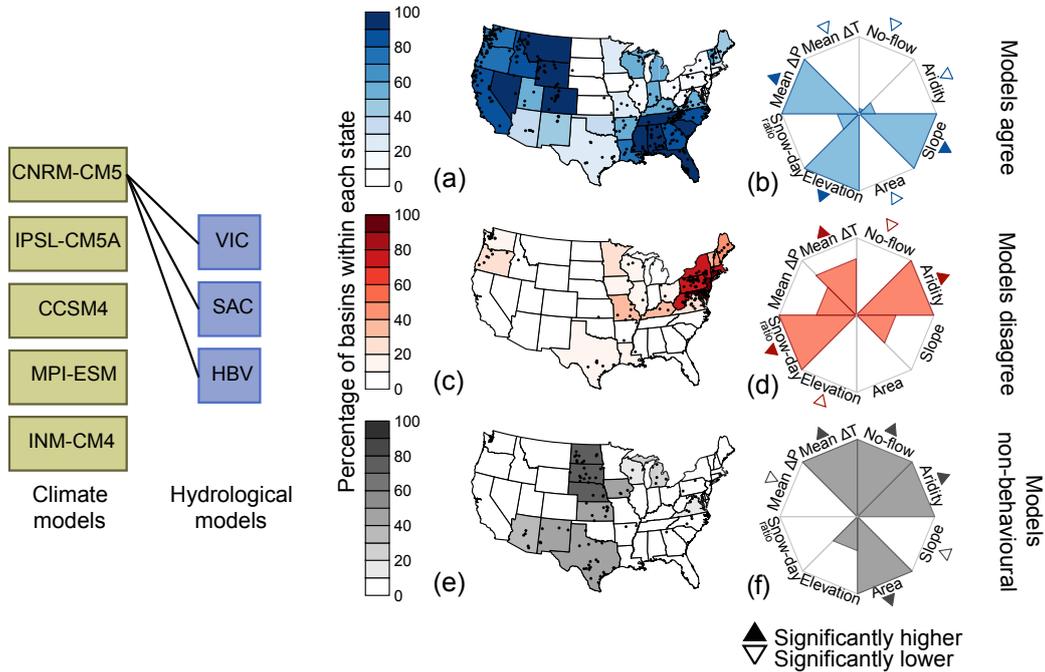


Figure 4. Spatial distribution of the basins in which the three hydrologic models agree on the sign of change in mean annual runoff (a) and disagree on the sign (c), and of the basins in which all models were non-behavioural for the current climate with observed forcing (e). The rose plots (b, d, f) show the standardized catchment and climate characteristics for catchments shown in (a), (c), and (e), respectively. In the rose plots, “mean ΔP ” stands for the mean change in precipitation, and “mean ΔT ” for the mean change in temperature. The hydrologic models (VIC: Variable Infiltration Capacity model; SAC: Sacramento Soil Moisture Accounting model; HBV: Hydrologiska Byråns Vattenbalansavdelning model) were forced with CNRM-CM5 projections (Representative Concentration Pathway 8.5). The characteristics in the rose plots have been standardized from 0 to 1, where 0 represents the lowest value of the characteristics for the three displayed groups and 1 the highest value of the characteristics for the three displayed groups.

(or two, if one model was non-behavioural) hydrologic models agreed on the sign of the change. In 14 % of the basins two hydrologic models were non-behavioural, such that a mutual model comparison was impossible. In the remaining 14 % of the basins, none of the employed hydrologic models was behavioural. The agreement among the hydrologic models varied when forced with different GCMs (see Fig. A2). With CCSM4, the highest agreement among hydrologic models was established (in 59 % of the basins), with INM-CM4 the lowest agreement (45 %). The spatial structure of the agreement among the hydrologic models, as demonstrated in Fig. 3a, suggests a link with catchment and climate characteristics. We compared several characteristics for three different agreement categories (agreement, dark, and light blue dots in Fig. 3a; no agreement, orange and red dots in Fig. 3a; three models non-behavioural, black dots in Fig. 3a). Figure 4 shows the spatial distribution and summarizes the characteristics of the basins within each category. We only discuss the characteristics which were consistently significantly different when the three hydrologic models were forced with different GCMs.

The basins in which the three hydrologic models agree on the sign of the change (Fig. 4a) experience a signifi-

cantly lower projected temperature change compared to all other basins. Furthermore, these basins have on average a lower aridity, fewer or no dry periods, and a lower snow-day ratio. A logical explanation, namely that the basins in which the models agree experience a significantly larger change in precipitation as demonstrated in Fig. 4b, was found not to be consistent among the five GCMs. The basins in which the hydrologic models disagree on the sign of the change (Fig. 4c) are characterized by a consistently higher slope and elevation, and related to that, a significantly higher snow-day ratio (Fig. 4d). Disagreement among the hydrologic models can thus be attributed to the conceptualization of snow accumulation and melt processes. The basins in which none of the hydrologic models was able to capture current hydrological behaviour with observed forcing (i.e. where the models were non-behavioural, Fig. 4e) have a significantly higher aridity and intermittent streamflow behaviour (no-flow periods). This is related to basins with a larger area and a lower slope (Fig. 4f). These results imply that all hydrologic models have difficulty in mimicking dry conditions, where the interplay between soil moisture and evapotranspiration becomes important (Seneviratne et al., 2010). Our lack of understanding in these processes

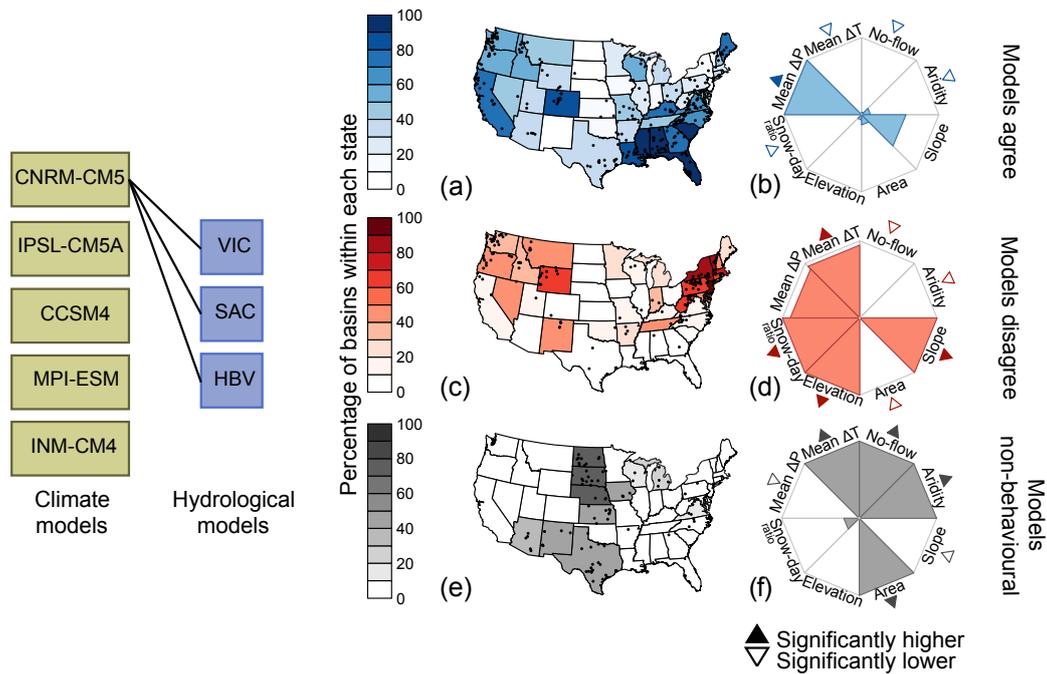


Figure 5. Spatial distribution of the basins in which the three hydrologic models agree on the sign of change in discharge timing (a) and disagree on the sign (c), and of the basins in which all models were non-behavioural for the current climate with observed forcing (e). The rose plots (b, d, and f) show the standardized catchment and climate characteristics for catchments shown in (a), (c), and (e), respectively. In the rose plots, “mean ΔP ” stands for the mean change in precipitation, and “mean ΔT ” for the mean change in temperature. The hydrologic models (VIC: Variable Infiltration Capacity model; SAC: Sacramento Soil Moisture Accounting model; HBV: Hydrologiska Byråns Vattenbalansavdelning model) were forced with CNRM-CM5 projections (Representative Concentration Pathway 8.5). The characteristics in the rose plots have been standardized from 0 to 1, where 0 represents the lowest value of the characteristics for the three displayed groups, and 1 the highest value of the characteristics for the three displayed groups.

is of concern, particularly as aridity is expected to increase in the future (Berg et al., 2016). Improved representation of these processes is needed, which will probably entail scrutinizing soil moisture–evapotranspiration feedbacks (Roderick et al., 2015). For the basins in Fig. 4e, a significantly lower change in precipitation is projected, consistent among the five GCMs.

3.2.2 Discharge timing

The sign of change in discharge timing can also be affected by the choice of the hydrological model. In 19% of the basins, the choice of the hydrologic model leads to disagreement in the sign of change when forced with the same CNRM-CM5 output, as shown in Fig. 3b. For the displayed case, in 52% of the basins, three (or two, if one model was non-behavioural) hydrologic models agreed on the sign of the change. On average over all the different climate models, the choice of the hydrologic model structure leads to disagreement in 23% of the basins (see also Fig. B2). As with the mean runoff metric, we also recognize a spatial structure in the agreement on the sign of change in discharge timing in Fig. 3b. Also for the discharge timing metric, we com-

pared several characteristics for three different agreement categories (agreement, dark and light blue dots in Fig. 3b; no agreement, orange and red dots in Fig. 3b; three models non-behavioural, black dots in Fig. 3b). The spatial distribution and the summarized characteristics are displayed in Fig. 5. Only the characteristics which were consistently significantly different over the different GCMs are discussed.

Three catchment characteristics are consistently significantly different for the basins in which there is agreement among hydrological models on the sign of change in discharge timing (Fig. 5a). These basins are characterized by a significantly lower amount of no-flow periods, and these basins have a higher slope and elevation compared to the basins where hydrological models lead to disagreement (Fig. 5c) or where models are non-behavioural (Fig. 5e). The results seem to imply that the models agree on discharge timing in mountainous regions. The basins in which the hydrologic models disagree on the sign of the change in discharge timing (Fig. 5c) have fewer no-flow periods, a higher aridity, and a lower elevation compared to all other basins. In contrast to the results for the mean runoff metric, mean ΔT and snow-day ratio do not consistently appear as explanatory variables, although especially the latter could potentially in-

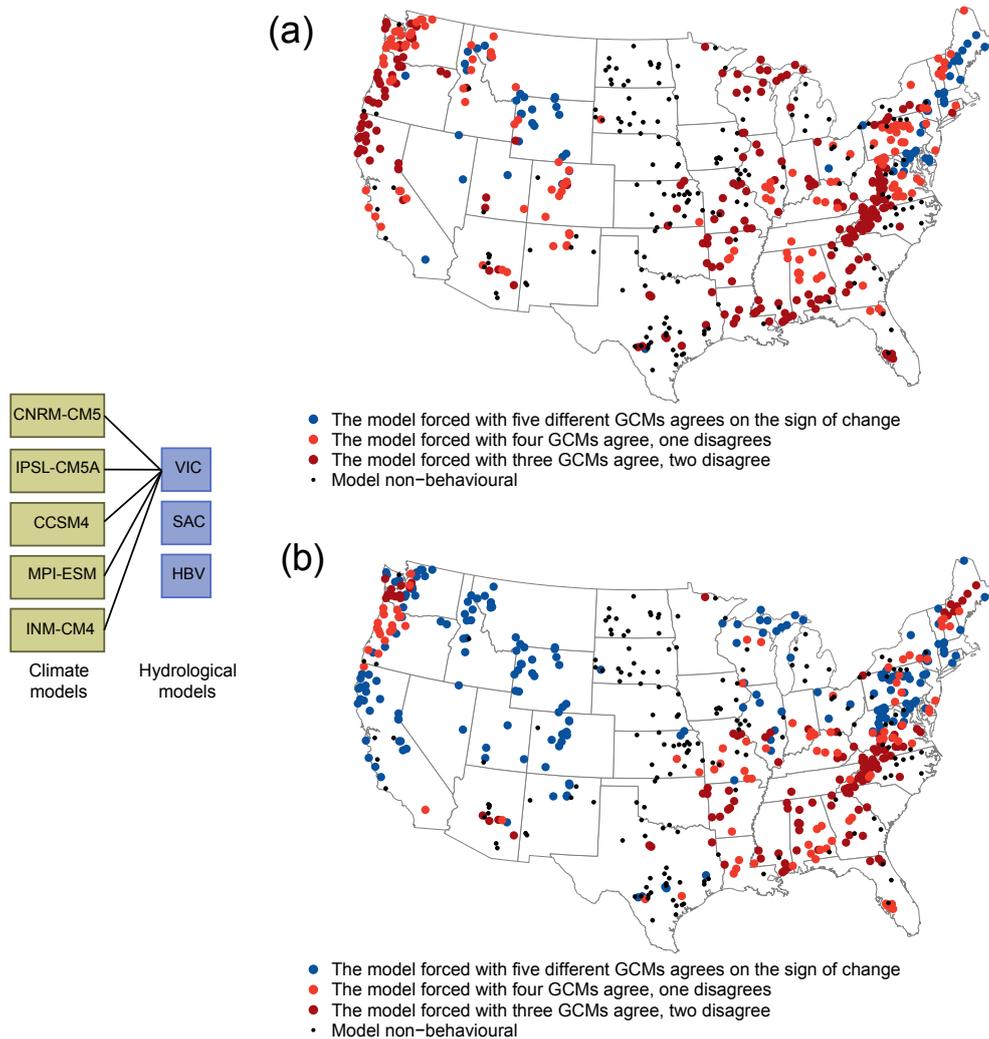


Figure 6. Distribution of uncertainty in the sign of change over the contiguous US when different GCMs are used to force a hydrological model. Left panel: combination of climate model and hydrologic model (VIC: Variable Infiltration Capacity model; SAC: Sacramento Soil Moisture Accounting model; HBV: Hydrologiska Byråns Vattenbalansavdelning model) for which the results are displayed. (a, b) Agreement on the sign of the ensemble mean change when the same hydrologic model (VIC) is forced with data from five different GCMs.

fluence discharge timing. The basins in which none of the hydrologic models was able to capture current hydrological behaviour with observed forcing are, naturally, equal for both the volume and the timing metric (Fig. 5e), and thus characterized by higher aridity, more no-flow periods, a lower slope, a larger area, and a smaller projected change in precipitation, as discussed in Sect. 3.2.1.

3.3 Impact of model forcing

3.3.1 Mean runoff

Uncertainty in the sign of change introduced by the climate forcing is shown to have an impact in the majority of the basins: in 60 % of the basins a different GCM forcing leads

to a different sign of change in mean runoff when the VIC hydrologic model is employed. Figure 6a shows that only in 11 % of the basins is the sign of the change consistent when the same hydrologic model (VIC) is forced with different climate model outputs. In the remaining 29 % of the basins, the hydrologic model was non-behavioural. When HBV is applied with five GCMs, 16 % of the basins show a consistent sign of change, for SAC only 8 % (see Fig. A3). Climate change characteristics have a major influence on the (dis)agreement in the sign of the change when the hydrologic model is forced with five different GCMs. The spatial distribution and the related climate change characteristics of two different categories (agreement, dark blue dots in Fig. 6a; disagreement, orange and red dots in Fig. 6a) are shown in Fig. 7. We only discuss the characteristics which were con-

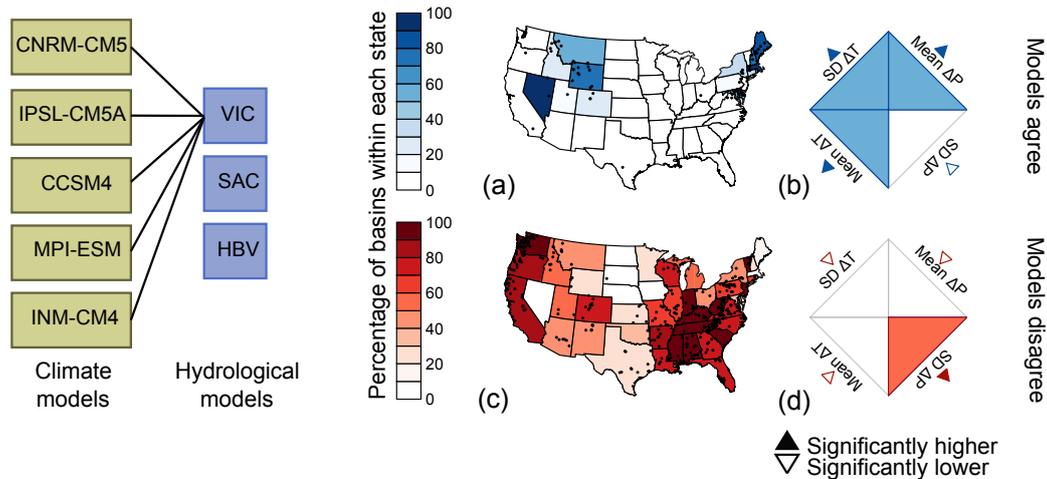


Figure 7. Spatial distribution of the basins in which Variable Infiltration Capacity model (VIC) simulations driven by the five climate models fully agree on the sign of change in mean annual runoff (a) and disagree on the sign of change (c). The rose plots (b, d) show standardized climate change characteristics for catchments shown in (a) and (c), respectively. The “SD ΔT ” (P) stands for the standard deviation of the projected change in temperature (precipitation) for the five different climate models; “mean ΔT ” (P) is the mean projected change in temperature (precipitation) of the five different climate models. The characteristics in the rose plots have been standardized from 0 to 1, where 0 represents the lowest value of the characteristics for the two displayed groups, and 1 the highest value of the characteristics for the two displayed groups. Left panel: combination of climate model and hydrologic model (VIC: Variable Infiltration Capacity model; SAC: Sacramento Soil Moisture Accounting model; HBV: Hydrologiska Byråns Vattenbalansavdelning model) for which the results are displayed.

sistently significantly different among the three different hydrologic models when forced with five GCMs.

The basins with agreement on the sign of the change (Fig. 7a) are characterized by a significantly lower standard deviation in the projected change in precipitation (Fig. 7b), i.e. the GCMs agree more on the projected change in precipitation. The basins in which the models disagree on the sign of the change (Fig. 7c) have a significantly larger change in precipitation, a smaller change in temperature, a smaller standard deviation in temperature among the five GCMs, but a larger standard deviation in precipitation among the five GCMs (Fig. 7d).

3.3.2 Discharge timing

In 36 % of the basins, different GCM forcing leads to a different sign of change in discharge timing, when the VIC model is employed (Fig. 6b), whereas in 35 % of the basins, there is agreement on the sign of change when the same hydrological model is forced with five different GCM outputs. This is substantially different from the findings for the mean runoff metric (where 60 and 11 % of the basins experienced disagreement and agreement, respectively). Also for the other hydrological models, the percentage of basins in which there is agreement on the sign of change is higher for the discharge timing than for the mean runoff: with SAC, in 31 % of the basins there is agreement on the sign of change, and with HBV, 24 % of the basins (see Fig. B3), although the impact of the GCMs on the agreement is still remarkable. Figure 6

shows that the different results for the two metrics can particularly be found in the western part of the US. The spatial distribution of (dis)agreement on the sign of change in discharge timing is related to climate change characteristics in Fig. 8. Only the climate change characteristics that have been shown to consistently significantly differ over the three hydrological models are discussed.

The basins in which there is agreement on the sign of change in discharge timing (Fig. 8a) experience a significantly higher change in temperature and change in precipitation (Fig. 8b). Disagreement among the GCMs concerning the change in temperature (std ΔT) was not consistently significantly higher for the three different hydrological models. For all three hydrological models, the basins in which different GCM forcing leads to disagreement on the trend direction (Fig. 8c) experience a lower change in temperature, a higher change in precipitation, a higher agreement on the change in temperature, but, as we also saw for the mean runoff metric, a higher disagreement on the change in precipitation. These results show that precipitation is the driving force for hydrologic models, and that the disagreement among GCMs regarding the change in precipitation introduces uncertainty in the hydrologic projection. Reducing this uncertainty, however, is not a trivial task (Knutti and Sedláček, 2013; Fatichi et al., 2016). While it may seem illogical that both the basins with agreement (Figs. 7a and 8a) and the basins with disagreement (Figs. 7c and 8c) have a significantly higher mean change in projected precipitation (Figs. 7b, d and 8b, d), this is because the basins in each category have been compared to

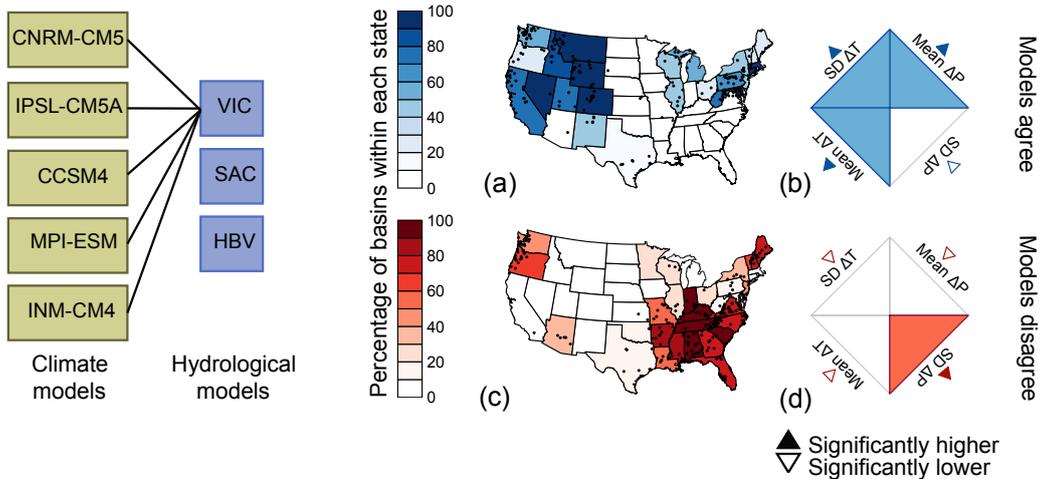


Figure 8. Spatial distribution of the basins in which Variable Infiltration Capacity model (VIC) simulations driven by the five climate models agree on the sign of change in discharge timing (a), and disagree on the sign of change (c). The rose plots (b, d) show standardized climate change characteristics for catchments shown in (a) and (c), respectively. The “SD ΔT ” (P) stands for the standard deviation of the projected change in temperature (precipitation) for the five different climate models; “mean ΔT ” (P) is the mean projected change in temperature (precipitation) of the five different climate models. The characteristics in the rose plots have been standardized from 0 to 1, where 0 represents the lowest value of the characteristics for the two displayed groups, and 1 the highest value of the characteristics for the two displayed groups. Left panel: combination of climate model and hydrologic model (VIC: Variable Infiltration Capacity model; SAC: Sacramento Soil Moisture Accounting model; HBV: Hydrologiska Byråns Vattenbalansavdelning model) for which the results are displayed.

all other basins, including the basins in which the hydrologic model was non-behavioural.

3.4 Combined uncertainty

One could expect that uncertainty introduced by the parameters is related to uncertainty introduced by the choice of the hydrologic model. This is, however, not the case. Figure 9 provides an overview of the investigated sources of uncertainty and their combined spatial distribution (see also Figs. A4 and B4).

3.4.1 Mean runoff

For the mean runoff metric, depending on which combination of hydrologic model and GCM is employed, 0 to only 5 % of the basins experience both uncertainty from the parameter sets and from the hydrologic model choice, and not from the climate model. The combination hydrologic model–GCM is more frequent (3–14 %) and the combination of parameter sets and GCM is most frequent (3–19 %). In 1 to 16 % of the basins, all three factors lead to uncertainty. The map in Fig. 9a also reveals a spatial pattern in relevant uncertainties; in the north-west combinations of parameter sets and climate model can be found, whereas in the north-east the combination hydrologic model–GCM is more common. In the south-east only GCM choice is the main source of uncertainty. The models are non-behavioural in the Great Plains area.

3.4.2 Discharge timing

Also for the discharge timing metric, only 0 to 5 % of the basins experience uncertainty from both the parameter sets and the hydrologic model choice. More frequent is the combination parameter set–GCM uncertainty (2–10 %), and most frequent is the combination hydrologic model–GCM (3–12 %). Figure 9b shows spatial clustering of the different sources of uncertainty: in the north-west, all three investigated sources of uncertainty influence the sign of the change in discharge timing, in the south-east the climate models dominate as a source of uncertainty, and in the north-east the hydrologic models lead to disagreement on the sign of change.

Comparing the two investigated metrics, Fig. 9a and b, we recognize generally comparable spatial patterns in the sources of uncertainty, for example the role of GCMs in the south-east and hydrologic models in the north-east. There are, however, also some differences. In the north-west, the sign of change in discharge timing is influenced by all three investigated sources of uncertainty, whereas the sign of change in mean runoff in the north-west is mainly controlled by the climate model and the parameter sets. In the south-east, we see for both a region influenced by the GCM, but for the discharge timing we see spots in this region where hydrologic model and parameter sets are also important. The most remarkable difference between both metrics is that for the discharge timing, a large region in the Midwest and parts

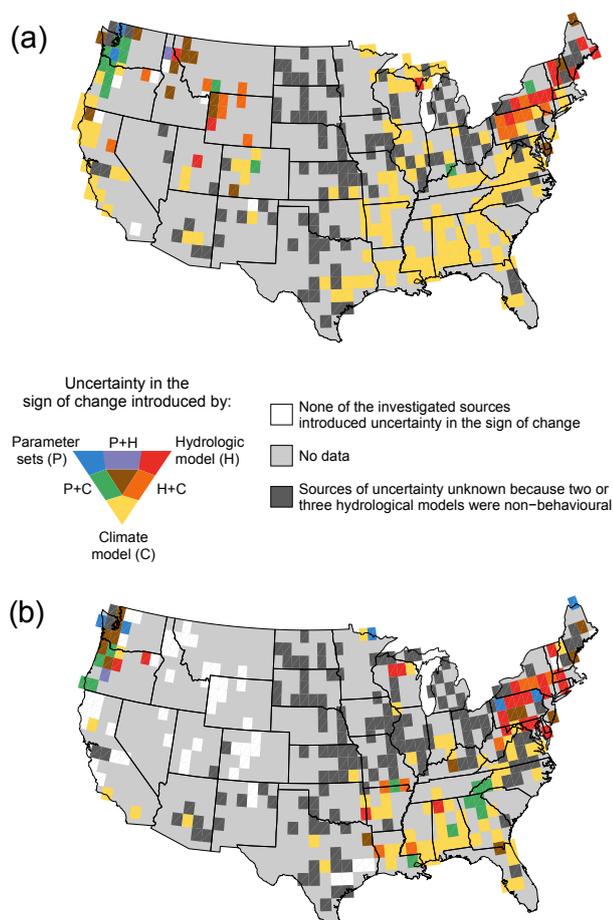


Figure 9. Distribution of the combined investigated sources of uncertainty for (a) mean runoff and (b) discharge timing. Spatial coverage is obtained by determining a grid-based ($1^\circ \times 1^\circ$) maximum likelihood; see Sect. 2.6. Results for different GCM–hydrologic model combinations can be found separately in Figs. A4 and B4. Note that three important sources of uncertainty have not been investigated in this study: internal climate variability, emission scenarios, and the statistical downscaling technique for GCM output.

of the west coast can be identified where there is unanimous agreement on the sign of change (the white grids in Fig. 9).

4 Discussion

We demonstrated that uncertainty in the projected changes in streamflow volume and timing is mainly controlled by the GCM forcing, followed by the choice of the hydrologic model and the parameter sets of the hydrologic models, respectively. In Fig. 9, it is shown that parameter uncertainty particularly occurs in the north-western US. These coastal basins are mainly precipitation-driven (Fritze et al., 2011) and receive, in the current climate, the highest precipitation sum in the US (see Fig. 1 in Newman et al., 2015). Further-

more, these basins had the highest number of behavioural parameter sets for SAC and VIC (Fig. C1). Several studies showed that humid circumstances enhance the calibration process (Melsen et al., 2014; Perrin et al., 2007; Yapo et al., 1996, e.g.), which can explain why so many parameters were classified as behavioural in these basins. This study, however, shows the downside of the “easy” identification of parameters in humid catchments: since so many different parameter sets are able to describe current discharge behaviour comparably well, it is difficult to distinguish which parameter sets capture the processes correctly, which increases the spread in future projections and subsequently leads to disagreement on the sign of change. As suggested in Sect. 3.1, one way of tackling this problem is to use observations from several states and fluxes to constrain the hydrologic models.

In the north-eastern US, hydrologic model induced uncertainty is more prominent. In Sect. 3.2, this was related to snow processes. The three employed hydrologic models have different model conceptualizations for snow processes, which can explain the contrasting results: VIC solves the energy balance to determine snow accumulation and ablation, while SAC and VIC use only a temperature-driven approach. The exact mechanisms behind the impact on runoff of a precipitation shift from snow towards rain are not yet well understood (Berghuijs et al., 2014), but it should also be acknowledged that not all our knowledge on snow processes is incorporated in the employed hydrologic models. Several other studies also identified snow processes as critical in hydrologic projections (e.g. Dobler et al., 2012; Vidal et al., 2016). These results provide a strong motivation to carefully test the snow conceptualization in hydrologic models before applying them in climate change impact studies.

Especially in the south-eastern US, disagreement in projections is mainly induced by the climate models, related to disagreement among the climate models on the change in precipitation (Sect. 3.3). An important conceptual assumption in this study is the offline application of climate models and hydrologic models, i.e. there is no feedback between the hydrologic models and the climate models. The interaction of the climate with the land surface is now only represented through land surface models included in the GCM. Changing the parameters or conceptualization of the land surface (like we did in this study with the hydrologic models) would therefore influence the GCM projection. Milly and Dunne (2016) demonstrate that an offline application of GCMs to, for example, hydrologic models severely influences the potential evapotranspiration, mainly because (hydrologic) models do not account for changes in stomatal conductance. A fully coupled approach, although computationally expensive in an uncertainty analysis that requires many runs, would therefore give a more realistic overview of the spread in the projections, and could perhaps limit this spread.

Besides the spatial pattern recognized in the three investigated sources of uncertainty, three other important sources of uncertainty have not been considered in this study, of

which one is the uncertainty in the emission scenario, which depends on greenhouse gas emissions and the policy that will be implemented to limit emissions. Two other important sources of uncertainty are the statistical downscaling technique of the GCM output and the internal climate variability. Gutmann et al. (2014) showed that different downscaling techniques each have their advantages and disadvantages. The technique employed here, bias-corrected spatial disaggregation (Wood et al., 2004), tends to overestimate the wet-day fraction and underestimate extreme events, which both can influence the hydrologic response of the catchment. Accounting for the internal climate variability implies considering different realizations of the same GCM. It has been demonstrated that slightly different initial conditions can lead to a substantially different GCM realization (Deser et al., 2012; Fatichi et al., 2016). Furthermore, land-use and soil parameters have been kept constant in the hydrologic model for both modelling periods, although it is very likely that land use will change in the future. The climate projections account for land-use change that is prescribed in the representative concentration pathway (in this study RCP8.5). These changes are, however, difficult to translate into the conceptual parameters of the employed hydrological models. Whereas VIC explicitly accounts for land use through e.g. root-zone thickness and stomatal resistance parameters, land use is not explicitly parameterized in SAC and HBV. Considering that at least three important sources of uncertainty have not been taken into account, this study likely presents an underestimation of the total uncertainty in the sign of change.

The substantial uncertainty in the sign of change, however, does not imply that it is impossible to say anything about future changes in our hydrologic system. We showed that the uncertainty in the sign of change is more widespread for the mean runoff metric than for the discharge timing metric. Addor et al. (2014) already showed that projected changes in the timing of discharge in Swiss catchments are significantly more robust (i.e. higher agreement among the ensemble members and greater deviation from the baseline) than changes in mean discharge. They also showed that the relative contribution of the different sources of uncertainty varies in space. Here, we use a greater number of catchments, covering a wider range of hydro-climatic conditions, to further explore what drives the uncertainty in hydrological projections. We found changes that are robust, and in regions where the changes are unclear, we determined what drives their uncertainty and outlined ways to reduce it.

5 Conclusions

The goal of this study was to reveal sources of uncertainty in hydrologic projections, and to provide directions for further research to decrease or account for this uncertainty, in order to define realistic quantitative hydrologic storylines. We focussed on the sign of change in mean annual runoff and dis-

charge timing (day of the year where half of the discharge has passed). In our results, GCM forcing was the main source of uncertainty, followed by the hydrologic model structure and the parameters of the hydrologic model. Different sources of uncertainty dominated in different regions. In general, there was more agreement on the sign of change in discharge timing than on the sign of change in mean runoff. Three important sources of uncertainty have not been considered: emission scenario, GCM downscaling technique, and internal climate variability.

In some regions parameters and/or hydrologic model uncertainty were the most important source of uncertainty, illustrating the need for improved process representation and parameter estimation in hydrologic models. We could relate the uncertainty in the mean runoff metric to snow and aridity processes dictated by the hydrologic model, and uncertainty in the discharge timing metric to basins with a lower elevation (non-mountainous regions). Uncertainty in both metrics was influenced by (dis)agreement among GCMs regarding the projected change in precipitation. Furthermore, our study revealed a spatial pattern in the uncertainty of hydrologic projections: different locations need different priorities to reduce uncertainty.

Our study included many of the headwaters of reservoirs that are currently used to store water for domestic supplies and irrigation, for example the Delaware River that feeds the Pepacton Reservoir, the main drinking water reservoir for New York City. The compelling social relevance of these basins provides a strong motivation to account for uncertainty in water management decisions, by using our understanding of uncertainty to develop quantitative hydrologic storylines.

Code and data availability. All codes to process the model results (mainly Matlab) and the model results themselves are available upon request by the corresponding author. Forcing and observed runoff for the complete dataset of catchments is publicly available; see Newman et al. (2014, 2015). Catchment characteristics are publicly available in the CAMELS dataset (Addor et al., 2017a, b).

The Supplement related to this article is available online at <https://doi.org/10.5194/hess-22-1775-2018-supplement>.

Author contributions. LM and AT designed the study in consultation with MC, NA, and RU. LM carried out the analyses. NM and AN constructed the SAC and VIC model set-up and prepared the forcing files. NA and AN prepared the catchment characteristics files. PT suggested the statistical tests. All authors contributed to the interpretation and reporting of the results.

Competing interests. The authors declare that they have no conflict of interest.

Edited by: Stacey Archfield

Reviewed by: Jens Kiesel and one anonymous referee

References

- Abebe, N., Ogden, F., and Pradhan, N.: Sensitivity and uncertainty analysis of the conceptual HBV rainfall–runoff model: Implications for parameter estimation, *J. Hydrol.*, 389, 301–310, <https://doi.org/10.1016/j.jhydrol.2010.06.007>, 2010.
- Addor, N., Rössler, O., Köplin, N., Huss, M., Weingartner, R., and Seibert, J.: Robust changes and sources of uncertainty in the projected hydrological regimes of Swiss catchments, *Water Resour. Res.*, 50, 7541–7562, <https://doi.org/10.1002/2014WR015549>, 2014.
- Addor, N., Newman, A., Mizukami, N., and Clark, M.: The CAMELS data set: catchment attributes and meteorology for large-sample studies, version 1.0, UCAR/NCAR, Boulder, CO, <https://doi.org/10.5065/D6G73C3Q>, 2017a.
- Addor, N., Newman, A. J., Mizukami, N., and Clark, M. P.: The CAMELS data set: catchment attributes and meteorology for large-sample studies, *Hydrol. Earth Syst. Sci.*, 21, 5293–5313, <https://doi.org/10.5194/hess-21-5293-2017>, 2017b.
- Anderson, E.: National Weather Service River Forecast System – Snow accumulation and ablation model, Tech. rep., NOAA NWS, HYDRO-17, US Department of Commerce, Silver Spring, MD, 1973.
- Beck, H., van Dijk, A., de Roo, A., Miralles, D., McVicar, T., Schellekens, J., and Bruijnzeel, L. A.: Global-scale regionalization of hydrologic model parameters, *Water Resour. Res.*, 52, 3599–3622, <https://doi.org/10.1002/2015WR018247>, 2016.
- Berg, A., Findell, K., Lintner, B., Giannini, A., Seneviratne, S. I., van den Hurk, B., Lorenz, R., Pitman, A., Hagemann, S., Meier, A., Cheruy, F., Ducharne, A., Malyshev, S., and Milly, P.: Land–atmosphere feedbacks amplify aridity increase over land under global warming, *Nat. Clim. Change*, 6, 869–874, <https://doi.org/10.1038/nclimate3029>, 2016.
- Berghuijs, W., Woods, R., and Hrachowitz, M.: A precipitation shift from snow towards rain leads to a decrease in streamflow, *Nat. Clim. Change*, 4, 583–586, <https://doi.org/10.1038/nclimate2246>, 2014.
- Bergström, S.: Development and application of a conceptual runoff model for Scandinavian catchments, Tech. rep., SMHI Report RHO 7, SMHI, Norrköping, 1976.
- Bergström, S.: The HBV model – its structure and applications, Tech. Rep. 4, SMHI reports hydrology, SMHI, Norrköping, 1992.
- Burnash, R., Ferral, R., and McGuire, R.: A generalized streamflow simulation system – conceptual modeling for digital computers, Tech. rep., US Department of Commerce, National Weather Service and State of California, Department of Water Resources, Sacramento, 1973.
- Chaney, N., Herman, J., Reed, P., and Wood, E.: Flood and drought hydrologic monitoring: the role of model parameter uncertainty, *Hydrol. Earth Syst. Sci.*, 19, 3239–3251, <https://doi.org/10.5194/hess-19-3239-2015>, 2015.
- Clark, M., Kavetski, D., and Fenicia, F.: Pursuing the method of multiple working hypotheses for hydrological modeling, *Water Resour. Res.*, 47, W09301, <https://doi.org/10.1029/2010WR009827>, 2011.
- Clark, M., Nijssen, B., Lundquist, J., Kavetski, D., Rupp, D., Woods, R., Freer, J., Gutmann, E., Wood, A., Brekke, L. D., Arnold, J., Gochis, D., and Rasmussen, R.: A unified approach for process-based hydrologic modeling: 1. Modeling concept, *Water Resour. Res.*, 51, 2498–2514, <https://doi.org/10.1002/2015WR017198>, 2015.
- Clark, M., Wilby, R., Gutmann, E., Vano, J., Gangopadhyay, S., Wood, A., Fowler, H., Prudhomme, C., Arnold, J., and Brekke, L.: Characterizing uncertainty of the hydrologic impacts of climate change, *Curr. Clim. Change Rep.*, 2, 55–64, <https://doi.org/10.1007/s40641-016-0034-x>, 2016.
- Demaria, E. M., Nijssen, B., and Wagener, T.: Monte Carlo sensitivity analysis of land surface parameters using the Variable Infiltration Capacity model, *J. Geophys. Res.*, 112, D11113, <https://doi.org/10.1029/2006JD007534>, 2007.
- Deser, C., Phillips, A., Bourdette, V., and Teng, H.: Uncertainty in climate change projections: the role of internal variability, *Clim. Dynam.*, 38, 527–546, <https://doi.org/10.1007/s00382-010-0977-x>, 2012.
- Dobler, C., Hagemann, S., Wilby, R. L., and Stötter, J.: Quantifying different sources of uncertainty in hydrological projections in an Alpine watershed, *Hydrol. Earth Syst. Sci.*, 16, 4343–4360, <https://doi.org/10.5194/hess-16-4343-2012>, 2012.
- Fatichi, S., Ivanov, V., Paschalis, A., Peleg, N., Molnar, P., Rimkus, S., Kim, J., Burlando, P., and Caporali, E.: Uncertainty partition challenges the predictability of vital details of climate change, *Earth's Future*, 4, 1–12, <https://doi.org/10.1002/2015EF000336>, 2016.
- Francini, M. and Pacciani, M.: Comparative analysis of several conceptual rainfall–runoff models, *J. Hydrol.*, 122, 161–219, [https://doi.org/10.1016/0022-1694\(91\)90178-K](https://doi.org/10.1016/0022-1694(91)90178-K), 1991.
- Fritze, H., Stewart, I., and Pebesma, E.: Shifts in Western North American Snowmelt Runoff Regimes for the Recent Warm Decades, *J. Hydrometeorol.*, 12, 989–1006, <https://doi.org/10.1175/2011JHM1360.1>, 2011.
- Gupta, H., Kling, H., Yilmaz, K., and Martinez, G.: Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling, *J. Hydrol.*, 377, 80–91, <https://doi.org/10.1016/j.jhydrol.2009.08.003>, 2009.
- Gupta, H., Perrin, C., Blöschl, G., Montanari, A., Kumar, R., Clark, M., and Andréassian, V.: Large-sample hydrology: a need to balance depth with breadth, *Hydrol. Earth Syst. Sci.*, 18, 463–477, <https://doi.org/10.5194/hess-18-463-2014>, 2014.
- Gutmann, E., Pruitt, T., Clark, M., Brekke, L., Arnold, J., Raff, D., and Rasmussen, R.: An intercomparison of statistical downscaling methods used for water resource assessments in the United States, *Water Resour. Res.*, 50, 7167–7186, <https://doi.org/10.1002/2014WR015559>, 2014.
- Haasnoot, M., Kwakkel, J., Walker, W., and ter Maat, J.: Dynamic adaptive policy pathways: A method for crafting robust decisions for a deeply uncertain world, *Global Environ. Change*, 23, 485–498, <https://doi.org/10.1016/j.gloenvcha.2012.12.006>, 2013.
- Knutti, R. and Sedláček, J.: Robustness and uncertainties in the new CMIP5 climate model projections, *Nat. Clim. Change*, 3, 369–373, <https://doi.org/10.1038/NCLIMATE1716>, 2013.

- Knutti, R., Masson, D., and Gettelman, A.: Climate model genealogy: Generation CMIP5 and how we got there, *Geophys. Res. Lett.*, 40, 1194–1199, <https://doi.org/10.1002/grl.50256>, 2013.
- Koster, R., Mahanama, S., Livneh, B., Lettenmaier, D., and Reichle, R.: Skill in streamflow forecasts derived from large-scale estimates of soil moisture and snow, *Nat. Geosci.*, 3, 613–616, <https://doi.org/10.1038/NGEO944>, 2010.
- Lhomme, J.: An examination of the Priestley-Taylor equation using a convective boundary layer model, *Water Resour. Res.*, 33, 2571–2578, <https://doi.org/10.1029/97WR01897>, 1997.
- Liang, X., Lettenmaier, D. P., Wood, E. F., and Burges, S. J.: A simple hydrologically based model of land surface water and energy fluxes for general circulation models, *J. Geophys. Res.*, 99, 14415–14458, <https://doi.org/10.1029/94JD00483>, 1994.
- Liang, X., Wood, E. F., and Lettenmaier, D. P.: Surface soil moisture parameterization of the VIC-2L model: Evaluation and modification, *Global Planet. Change*, 13, 195–206, [https://doi.org/10.1016/0921-8181\(95\)00046-1](https://doi.org/10.1016/0921-8181(95)00046-1), 1996.
- McMillan, H., Seibert, J., Petersen-Overleir, A., Lang, M., White, P., Snelder, T., Rutherford, K., Krueger, T., Mason, R., and Kiang, J.: How uncertainty analysis of streamflow data can reduce costs and promote robust decisions in water management applications, *Water Resour. Res.*, 53, 5220–5228, <https://doi.org/10.1002/2016WR020328>, 2017.
- Melsen, L., Teuling, A., van Berkum, S., Torfs, P., and Uijlenhoet, R.: Catchments as simple dynamical systems: A case study on methods and data requirements for parameter identification, *Water Resour. Res.*, 50, 5577–5596, <https://doi.org/10.1002/2013WR014720>, 2014.
- Melsen, L., Teuling, A., Torfs, P., Zappa, M., Mizukami, N., Clark, M., and Uijlenhoet, R.: Representation of spatial and temporal variability in large-domain hydrological models: Case study for a mesoscale prealpine basin, *Hydrol. Earth Syst. Sci.*, 20, 2207–2226, <https://doi.org/10.5194/hess-20-2207-2016>, 2016.
- Mendoza, P. A., Clark, M., Mizukami, N., Newman, A., Barlage, M., Gutmann, E., Rasmussen, R., Rajagopalan, B., Brekke, L., and Arnold, J.: Effects of hydrologic model choice and calibration on the portrayal of climate change impacts, *J. Hydrometeorol.*, 16, 762–780, <https://doi.org/10.1175/JHM-D-14-0104.1>, 2015a.
- Mendoza, P. A., Clark, M., Barlage, M., Rajagopalan, B., Samaniego, L., Abramowitz, G., and Gupta, H.: Are we unnecessarily constraining the agility of complex process-based models?, *Water Resour. Res.*, 51, 716–728, <https://doi.org/10.1002/2014WR015820>, 2015b.
- Merz, R., Parajka, J., and Blöschl, G.: Time stability of catchment model parameters: Implications for climate impact analyses, *Water Resour. Res.*, 47, W02531, <https://doi.org/10.1029/2010WR009505>, 2011.
- Milly, P. and Dunne, K.: Potential evapotranspiration and continental drying, *Nat. Clim. Change*, 6, 946–949, <https://doi.org/10.1038/NCLIMATE3046>, 2016.
- Milly, P., Wetherald, R., Dunne, K., and Delworth, T.: Increasing risk of great floods in a changing climate, *Nature*, 415, 514–517, <https://doi.org/10.1038/415514a>, 2002.
- Milly, P., Dunne, K., and Vecchia, A.: Global pattern of trends in streamflow and water availability in a changing climate, *Nature*, 438, 347–350, <https://doi.org/10.1038/nature04312>, 2005.
- National Weather Service: II.3-SAC-SMA Conceptualization of the Sacramento soil moisture accounting model, Tech. rep., National Oceanic and Atmospheric Administration (NOAA), Silver Spring, 2002.
- Newman, A., Sampson, K., Clark, M., Bock, A., Viger, R., and Blodgett, D.: A large sample watershed-scale hydrometeorological dataset for the contiguous USA, UCAR/NCAR, Boulder, CO, <https://doi.org/10.5065/D6MW2F4D>, 2014.
- Newman, A., Clark, M., Sampson, K., Wood, A., Hay, L., Bock, A., Viger, R., Blodgett, D., Brekke, L., Arnold, J., Hopson, T., and Duan, Q.: Development of a large-sample watershed-scale hydrometeorological data set for the contiguous USA: data set characteristics and assessment of regional variability in hydrologic model performance, *Hydrol. Earth Syst. Sci.*, 19, 209–223, <https://doi.org/10.5194/hess-19-209-2015>, 2015.
- Oreskes, N., Shrader-Frechette, K., and Belitz, K.: Verification, validation, and confirmation of numerical models in the Earth Sciences, *Science*, 263, 641–646, <https://doi.org/10.1126/science.263.5147.641>, 1994.
- Parajka, J., Merz, R., and Blöschl, G.: Uncertainty and multiple objective calibration in regional water balance modelling: case study in 320 Austrian catchments, *Hydrol. Process.*, 21, 435–446, <https://doi.org/10.1002/hyp.6253>, 2007.
- Perrin, C., Oudin, L., Andréassian, V., Rojas-Serna, C., Michel, C., and Mathevet, T.: Impact of limited streamflow data on the efficiency and the parameters of rainfall-runoff models, *Hydrolog. Sci. J.*, 52, 131–151, <https://doi.org/10.1623/hysj.52.1.131>, 2007.
- Pool, S., Vis, M., Knight, R., and Seibert, J.: Streamflow characteristics from modeled runoff time series – importance of calibration criteria selection, *Hydrol. Earth Syst. Sci.*, 21, 5443–5457, <https://doi.org/10.5194/hess-21-5443-2017>, 2017.
- Rakovec, O., Kumar, R., Attinger, S., and Samaniego, L.: Improving the realism of hydrologic model functioning through multivariate parameter estimation, *Water Resour. Res.*, 52, 7779–7792, <https://doi.org/10.1002/2016WR019430>, 2016.
- Roderick, M., Greve, P., and Farquhar, G.: On the assessment of aridity with changes in atmospheric CO₂, *Water Resour. Res.*, 51, 5450–5463, <https://doi.org/10.1002/2015WR017031>, 2015.
- Roudier, P., Andersson, J., Donnelly, C., Feyen, L., Greuell, W., and Ludwig, F.: Projections of future floods and hydrological droughts in Europe under a +2 °C global warming, *Climatic Change*, 135, 341–355, <https://doi.org/10.1007/s10584-015-1570-4>, 2016.
- Seibert, J. and Vis, M.: Teaching hydrological modeling with a user-friendly catchment-runoff-model software package, *Hydrol. Earth Syst. Sci.*, 16, 3315–3325, <https://doi.org/10.5194/hess-16-3315-2012>, 2012.
- Seneviratne, S. I., Corti, T., Davin, E., Hirschi, M., Jaeger, E., Lehner, I., Orlowsky, B., and Teuling, A.: Investigating soil moisture–climate interactions in a changing climate: A review, *Earth-Sci. Rev.*, 99, 125–161, <https://doi.org/10.1016/j.earscirev.2010.02.004>, 2010.
- Sheffield, J., Wood, E., and Roderick, M.: Little change in global drought over the past 60 years, *Nature*, 491, 435–438, <https://doi.org/10.1038/nature11575>, 2012.
- Sheffield, J., Barrett, A., Colle, B., Fernando, D., Fu, R., Geil, K., Hu, Q., Kinter, J., Kumar, S., Langenbrunner, B., Lombardo, K., Long, L., Maloney, E., Mariotti, A., Meyerson, J., Mo, K., Neelin, J., Nigam, S., Pan, Z., Ren, T., Ruiz-

- Barradas, A., Serra, Y., Seth, A., Thibeault, J., Stroeve, J., Yang, Z., and Yin, L.: North American Climate in CMIP5 Experiments. Part I: Evaluation of Historical Simulations of Continental and Regional Climatology, *J. Climate*, 26, 9209–9244, <https://doi.org/10.1175/JCLI-D-12-00592.1>, 2013.
- Sonnenborg, T. O., Seifert, D., and Refsgaard, J.: Climate model uncertainty versus conceptual geological uncertainty in hydrological modeling, *Hydrol. Earth Syst. Sci.*, 19, 3891–3901, <https://doi.org/10.5194/hess-19-3891-2015>, 2015.
- Thornton, P. E., Thornton, M., Mayer, B., Wilhelmi, N., Wei, Y., and Cook, R.: Daymet: Daily surface weather on a 1 km grid for North America, 1980–2012, Oak Ridge National Laboratory, <http://daymet.ornl.gov/> (last access: 15 July 2013), 2012.
- Uhlenbrook, S., Seibert, J., Leibundgut, C., and Rodhe, A.: Prediction uncertainty of conceptual rainfall-runoff models caused by problems in identifying model parameters and structure, *Hydrolog. Sci. J.*, 44, 779–797, 1999.
- Van Loon, A., Gleeson, T., Clark, J., Van Dijk, A., Stahl, K., Hannaford, J., Di Baldassarre, G., Teuling, A., Tallaksen, L., Uijlenhoet, R., Hannah, D., Sheffield, J., Svoboda, M., Verbeiren, B., Wagener, T., Rangecroft, S., Wanders, N., and Van Lanen, H.: Drought in the Anthropocene, *Nat. Geosci.*, 9, 89–91, <https://doi.org/10.1038/ngeo2646>, 2016.
- Van Vliet, M. T. H., Yearsly, J. R., Ludwig, F., Vögele, S., Lettenmaier, D. P., and Kabat, P.: Vulnerability of US and European electricity supply to climate change, *Nat. Clim. Change*, 2, 676–681, <https://doi.org/10.1038/nclimate1546>, 2012.
- Vaze, J., Post, D., Chiew, F., Perraud, J., Viney, N., and Teng, J.: Climate non-stationarity – Validity of calibrated rainfall-runoff models for use in climate change studies, *J. Hydrol.*, 394, 447–457, <https://doi.org/10.1016/j.jhydrol.2010.09.018>, 2010.
- Vidal, J., Hingray, B., Magand, C., Sauquet, E., and Ducharne, A.: Hierarchy of climate and hydrological uncertainties in transient low-flow projections, *Hydrol. Earth. Syst. Sci.*, 20, 3651–3672, <https://doi.org/10.5194/hess-20-3651-2016>, 2016.
- Wood, A., Leung, L., Sridhar, V., and Lettenmaier, D.: Hydrologic implications of dynamical and statistical approaches to downscaling climate model output, *Climatic Change*, 15, 189–216, <https://doi.org/10.1023/B:CLIM.0000013685.99609.9e>, 2004.
- Yapo, P. O., Gupta, H. V., and Sorooshian, S.: Automatic calibration of conceptual rainfall-runoff models: sensitivity to calibration data, *J. Hydrol.*, 181, 23–48, [https://doi.org/10.1016/0022-1694\(95\)02918-4](https://doi.org/10.1016/0022-1694(95)02918-4), 1996.
- Zhao, R., Zuang, Y., Fang, L., Liu, X., and Zhang, Q.: The Xinanjiang model, in: *Hydrological forecasting – Prévisions hydrologiques*, Proceedings of the Oxford Symposium, April 1980, Oxford, 351–356, 1980.